




ROVIC TILES

White Body Ceramic Tiles


3_D

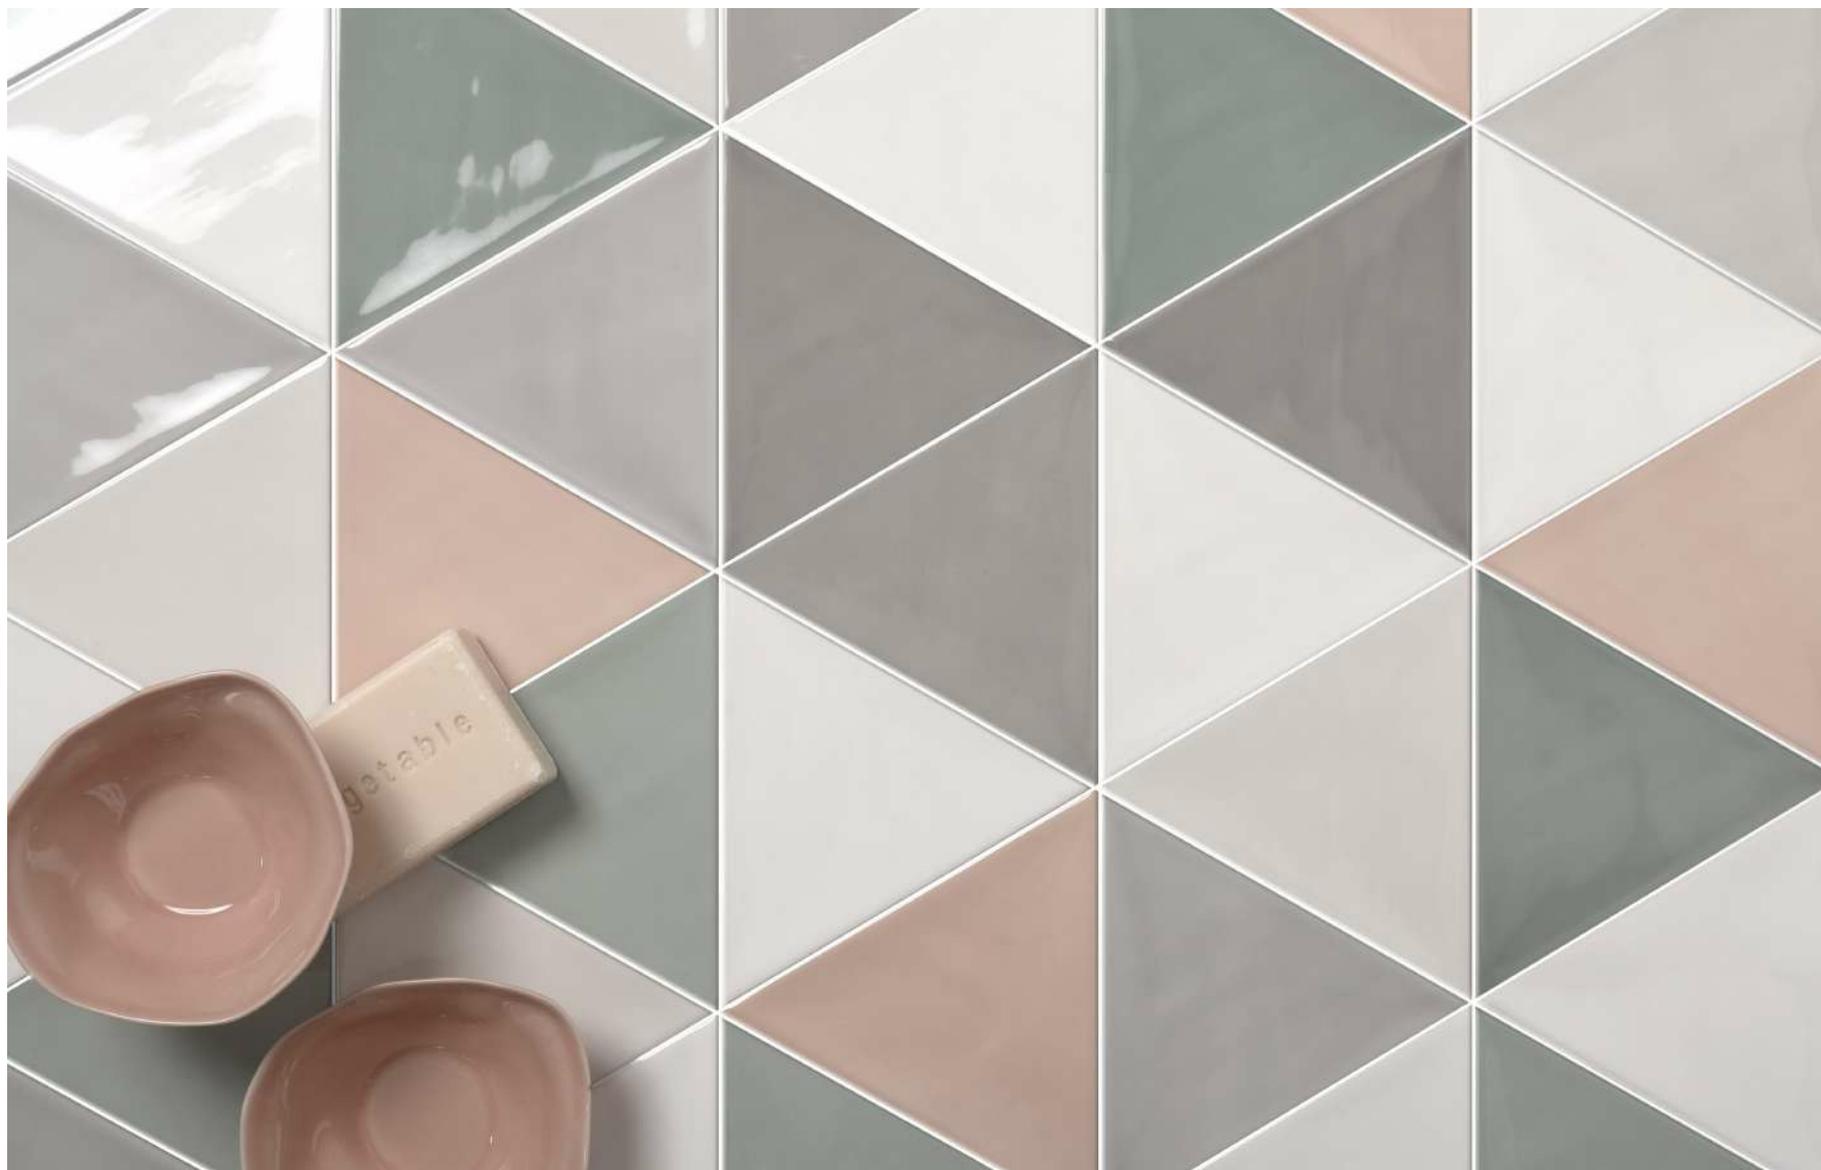

13,2X11,4CM
5.2"X4.5"

9MM

grigio scuro, acquamarina, grigio medio,
grigio chiaro, rosa lucido

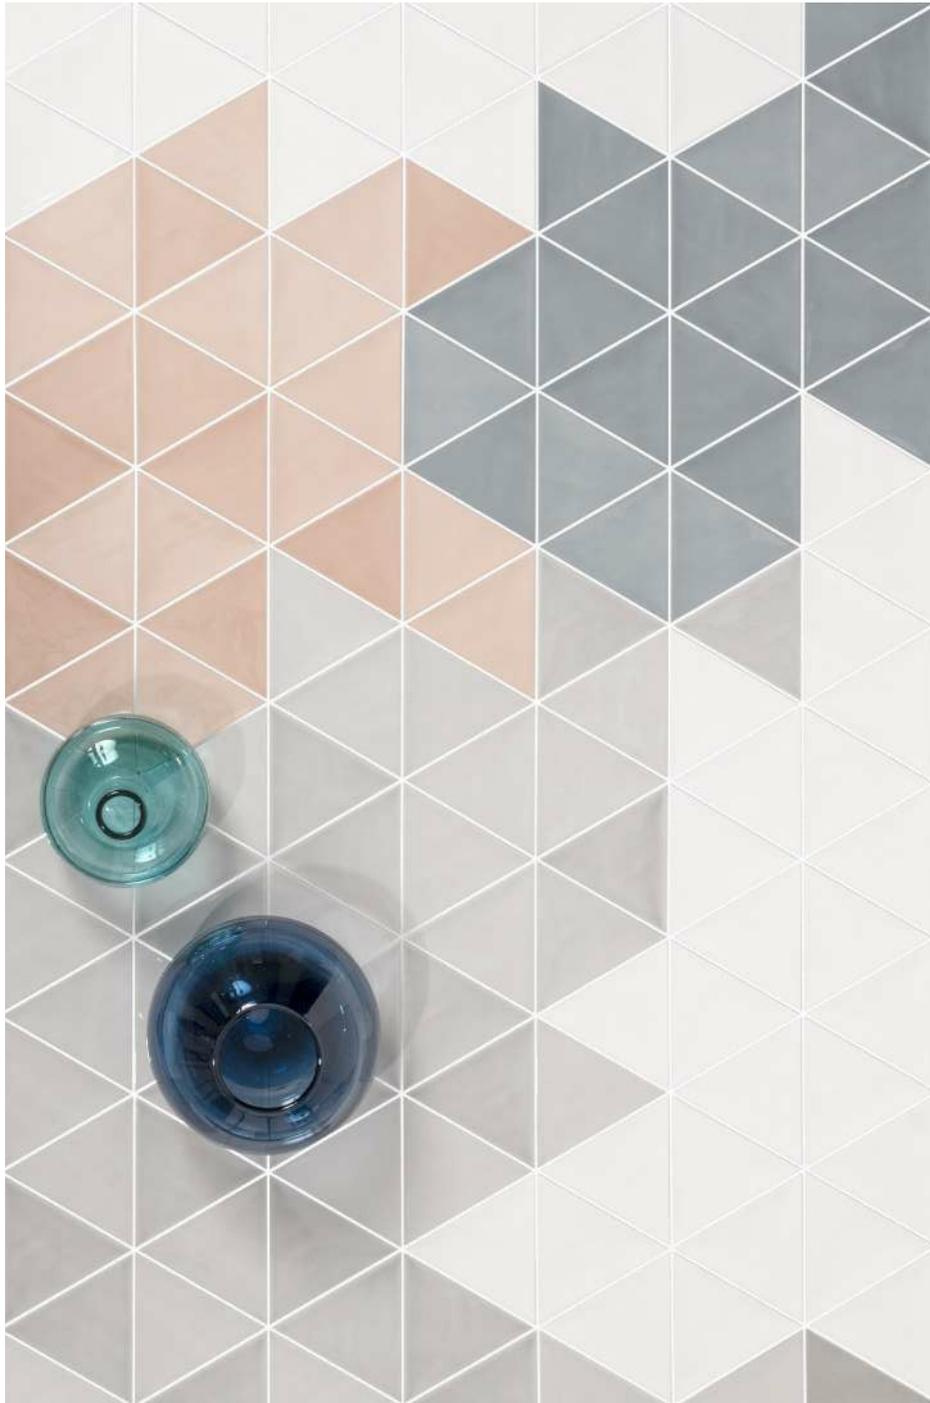

3_D

white body tiles

13,2 X 11,4CM

5.2"X4.5"



9MM

Shade variation

This wall tile collection uses the triangle as the base element of a meticulous, infinitely modular style.

The colours create sophisticated graphic patterns, with both powerful contrasts and delicate shifts in tone.

The gloss glaze of the surface and its soft and fluid structure, collects and reflects light and slivers of colour.

The surface structure, colours and side lengths can all be combined with the FRAME collection.



3_D grigio scuro, FRAME base grigio scuro
COPSE bianco



3_D bianco, grigio chiaro, grigio medio, carta da zucchero




3_D carta da zucchero
LOGIC segmenti carata da zucchero



3_D rosa




3_D gold, bronze, steel

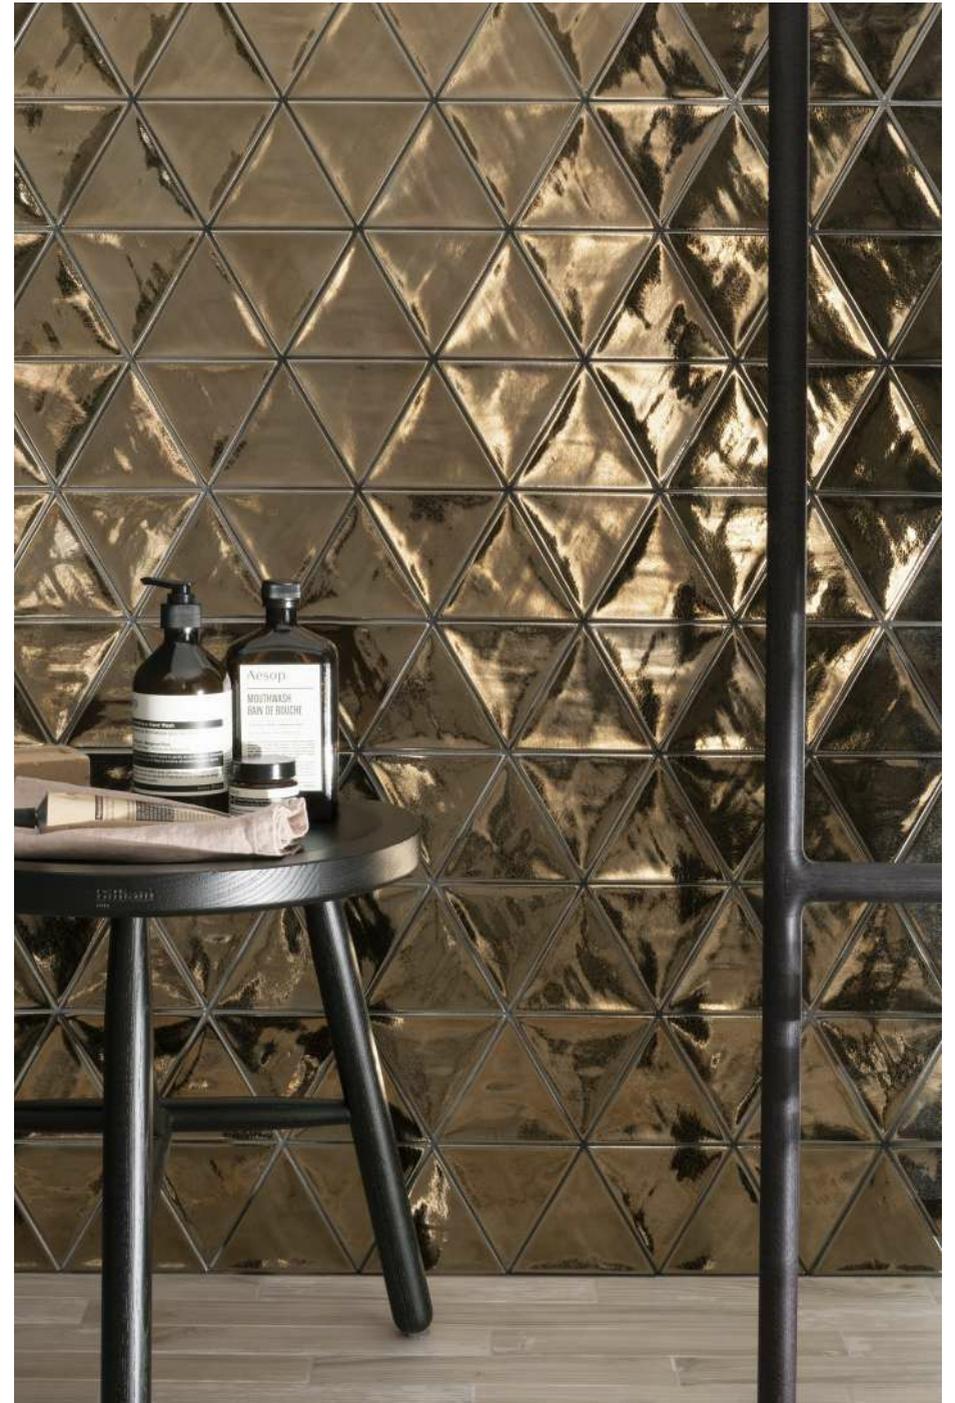

3_D gold
COPSE beige



3_D acquamarina

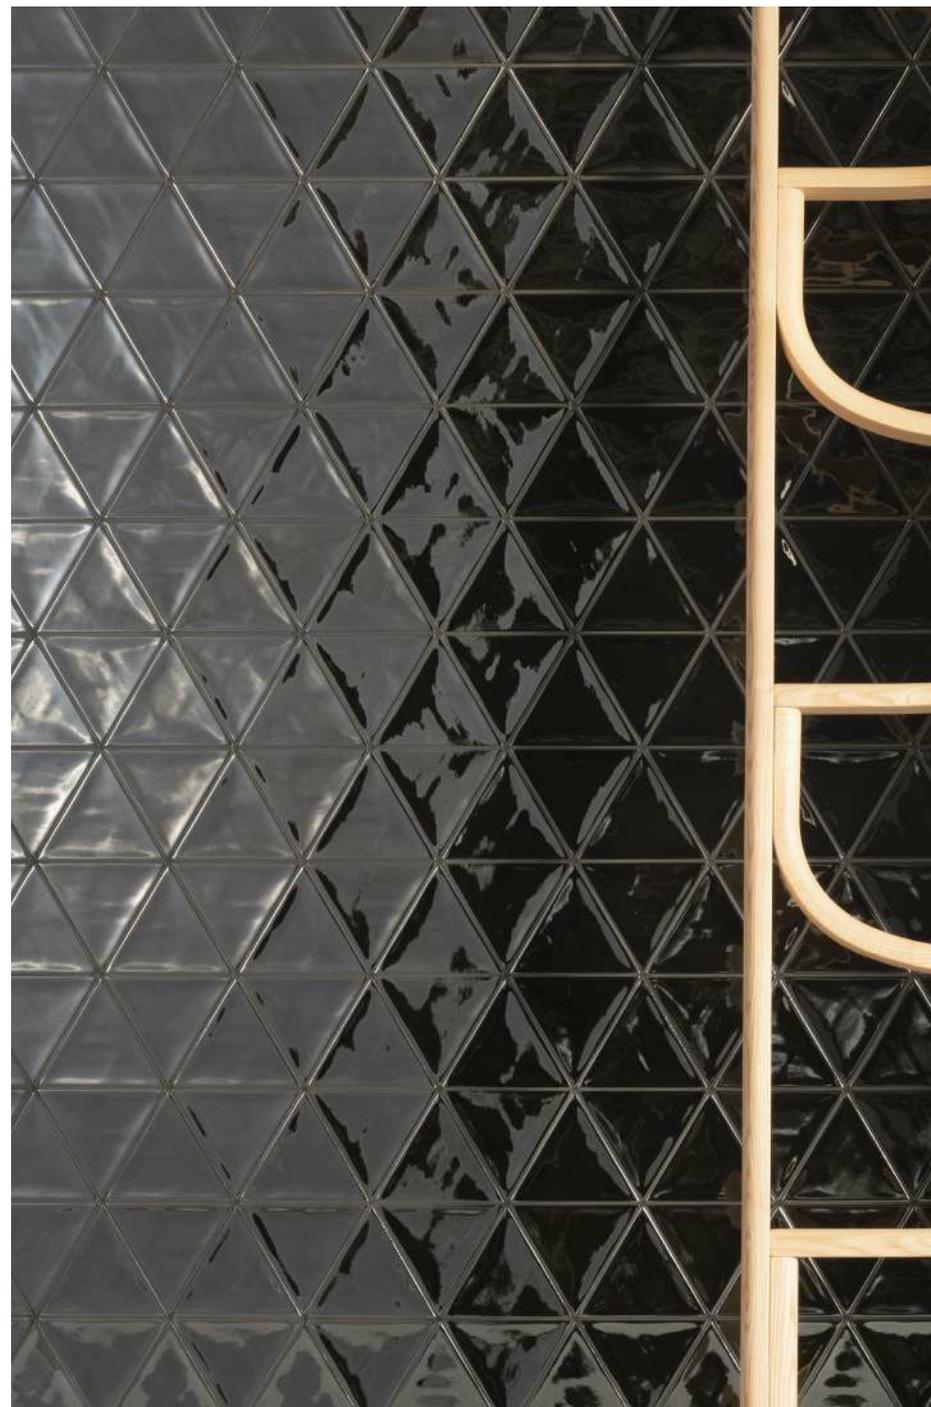

3_D steel

3_D

white body tiles
Stonalizzato
Shade variation

13,2X11,4CM X 9MM
5.2"X4.5"

bianco lucido



TRL101L

steel



TRL110L

bronze



TRL108L

gold



TRL109L



WARNING: TILES WITH METALLIC COLORS:
Metallic colors are made with special glazes that tends to have a natural crackle effect and low resistance to acidic and alkaline cleaning products. Do not use aggressive cleaning products, such as bleach or ammonia. Check the installation and maintenance guide at page.168

grigio chiaro lucido



TRL102L

grigio medio lucido



TRL103L

grigio scuro lucido



TRL104L

acquamarina lucido



TRL107L

carta da zucchero lucido



TRL105L

rosa lucido



TRL106L

Caratteristiche tecniche

Technical features

		NORMA standard	VALORE RICHIESTO required standards	3_D
DIMENSIONI dimensions	LUNGHEZZA E LARGHEZZA length and width	UNI-EN ISO 10545-2	± 0.5%	CONFORME compliant
	SPESSORE thickness	UNI-EN ISO 10545-2	± 10%	CONFORME compliant
	RETTILINEITÀ DEGLI SPIGOLI straightness of sides	UNI-EN ISO 10545-2	± 0.3%	CONFORME compliant
	ORTOGONALITÀ rectangularity	UNI-EN ISO 10545-2	± 0.5%	CONFORME compliant
	PLANARITÀ - CURVATURA DEL CENTRO surface flatness - centre curvature	UNI-EN ISO 10545-2	± 0.5% - 0.3%	CONFORME compliant
	PLANARITÀ - CURVATURA DELLO SPIGOLO surface flatness - edge curvature	UNI-EN ISO 10545-2	± 0.5% - 0.3%	CONFORME compliant
	PLANARITÀ - SVERGOLAMENTO surface flatness - warpage	UNI-EN ISO 10545-2	± 0.5%	CONFORME compliant
RESISTENZA ALLA FLESSIONE bending strenght	CARICO DI ROTTURA breaking of rupture	UNI-EN ISO 10545-4	> 600 N (□ 7,5 MM) > 200 N (< 7,5 MM)	CONFORME compliant
	MODULO DI ROTTURA modulus of rupture	UNI-EN ISO 10545-4	> 12 N/MM ² (□ 7,5 MM) > 15 N/MM ² (< 7,5 MM)	CONFORME compliant
	ASSORBIMENTO D'ACQUA water absorption	UNI-EN ISO 10545-3	> 10 %	CONFORME compliant
	RESISTENZA DEI COLORI ALLA LUCE colour resistance to light	DIN 51094	-	RESISTENTE resistant
	COEFFICIENTE DI DILATAZIONE TERMICA LINEARE (100° C) linear thermal expansion coefficient (100° C)	UNI-EN ISO 10545-8	METODO DISPONIBILE test method available	METODO DISPONIBILE test method available
	RESISTENZA AGLI SBALZI TERMICI thermal shock resistance	UNI-EN ISO 10545-9	-	RESISTENTE* resistant*
	RESISTENZA AL CAVILLO crazing resistance	UNI-EN ISO 10545-11	-	RESISTENTE* resistant*
	RESISTENZA ALLE MACCHIE resistance to stains	UNI-EN ISO 10545-14	CLASSE 3 MIN.	CLASSE 5* Class 5*
	RESISTENZA CHIMICA chemical resistance	UNI-EN ISO 10545-13	GB MIN.	GARANTITA* guaranteed* (GA GLA GHA)
	PIOMBO E CADMIO RILASCIATI lead and cadmium given off	UNI-EN ISO 10545-15	METODO DISPONIBILE test method available	METODO DISPONIBILE test method available
	REAZIONE AL FUOCO reaction to fire	EN 13501-1	-	A1
	VARIAZIONE DI TONO shade variations	-	-	BIANCO: V2 ALTRI COLORI/ OTHER COLORS: V3

Imballi Packing

ARTICOLO ITEM	FORMATO SIZE	PZ	MQ	KG
3 D	13,2x11,4cm 5.2"x4.5"	30	0,23	3,67

SCATOLA BOX




ARTICOLO ITEM	FORMATO SIZE	BOX	PZ	MQ	KG
3 D	13,2x11,4cm 5.2"x4.5"	126	3.780	28,98	482

PALLET PALLET



Dimensioni Sizing



Laying instructions

Laying instructions for tiles with colour variation:

It is recommended to take tiles from several boxes at a time to ensure proper shade variation that enhances the variability and randomness of the finished surface.

RIVESTIMENTO IN MONOPOROSA PASTA BIANCA GLAZED WHITE-BODIED POROUS SINGLE-FIRED WALL TILES

Piastrelle di ceramica pressate a secco con assorbimento d'acqua Eb > 10 %. Caratteristiche di qualità secondo i test di controllo previsti dalla norma EN14411:2013 appendice L gruppo BIII GL.

Dry-pressed ceramic tiles with water absorption Eb > 10 %. Quality specification, according to control test of EN14411:2013 appendix L group BIII GL

* AD ECCEZIONE DEI COLORI METALLIZZATI (oro, bronzo, acciaio) EXCLUDING METALLIC COLORS (oro, bronzo, acciaio)



HEAD OFFICE
E6 Chaucer Business Park
Watery Lane, Kemsing
TN15 6YP
01732 763167
info@rovic.co.uk

BECKENHAM
367 Blandford Road
BR3 4NW
0208 658 7272
beckenham@rovic.co.uk

WEST MALLING
51 High Street
ME19 6QH
01732 848250
westmalling@rovic.co.uk

www.rovic.co.uk