



DECADENCE

RECTIFIED COLOUR BODY PORCELAIN



DECADENCE

RECTIFIED COLOR BODY PORCELAIN
Natural R10 | A+B | Bush hammered R10 | A+B | Bush hammered grip R11 | A+B+C

5 COLOURS

V3 MEDIUM

puro natural R10 - A+B	tortora natural R10 - A+B	beige natural R10 - A+B	bianco natural R10 - A+B	grigio natural R10 - A+B
puro satin	tortora satin	beige satin	bianco satin	grigio satin
puro polished	tortora polished	beige polished	bianco polished	grigio polished
puro bush hammered R10 - A+B	tortora bush hammered R10 - A+B	beige bush hammered R10 - A+B	bianco Bush hammered R10 - A+B	grigio bush hammered R10 - A+B
puro b hamm grip R11 - A+B+C	tortora b hamm grip R11 - A+B+C	beige b hamm grip R11 - A+B+C	bianco b hamm grip R11 - A+B+C	grigio b hamm grip R11 - A+B+C

DECADENCE




RECTIFIED COLOR BODY PORCELAIN
Natural R10 | A+B | Bush hammered R10 | A+B | Bush hammered grip R11 | A+B+C

5 FINISHES

NATURAL | SATIN | POLISHED | BUSH HAMMERED | GRIP BUSH HAMMERED


5 SIZES

NATURAL | SATIN | POLISHED | BUSH HAMMERED
THICKNESS 10mm | 0.4"

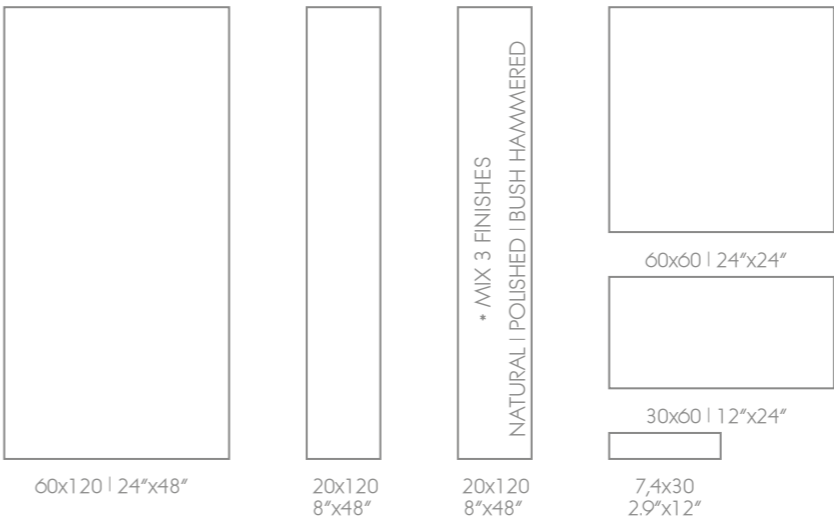


2 SIZES

BUSH HAMMERED GRIP RECTIFIED
THICKNESS 10mm | 0.4"

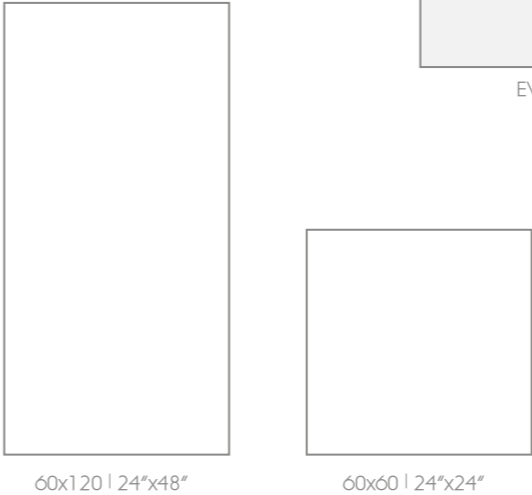

MIX 3 FINISHES 20x120_8" x48"

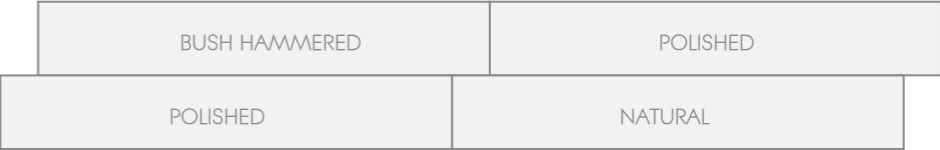

EVERY BOX CONTAINS: 2 PIECES POLISHED, 1 NATURAL, 1 BUSH HAMMERED

the bedroom

DECADENCE 20X120 PURE MIX is made up of polished, natural and bush-hammered surfaces that give elegance to any space. The PIXEL 2D MOSAIC for wall cladding recalls the play of surfaces by enclosing them in small 1.5x1.5 cm elements. The mix of three random finishes is highlighted by 2D layers.

DECADENCE



The PURE CONTRASTS
MOSAIC is an inter- weaving
porcelain stoneware
featuring golden gems that
make this decor ideal for
floors and walls.


the bathroom

TORTORA POLISHED
DECADENCE
60X120: minimalist and
with a strong impact. We
recommend laying the
tiles with a 2 mm joint
matching their colour to
give continuity to the
surface and highlight and
enhance their graphic
appearance. On the
outside, laying is
completed with 60x120
bush-hammered grip tiles.


the kitchen



DECADENCE

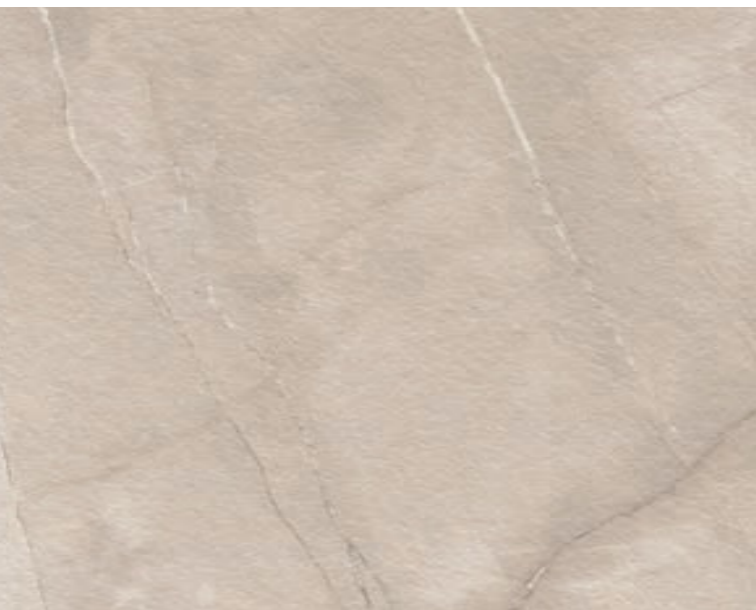

the kitchen

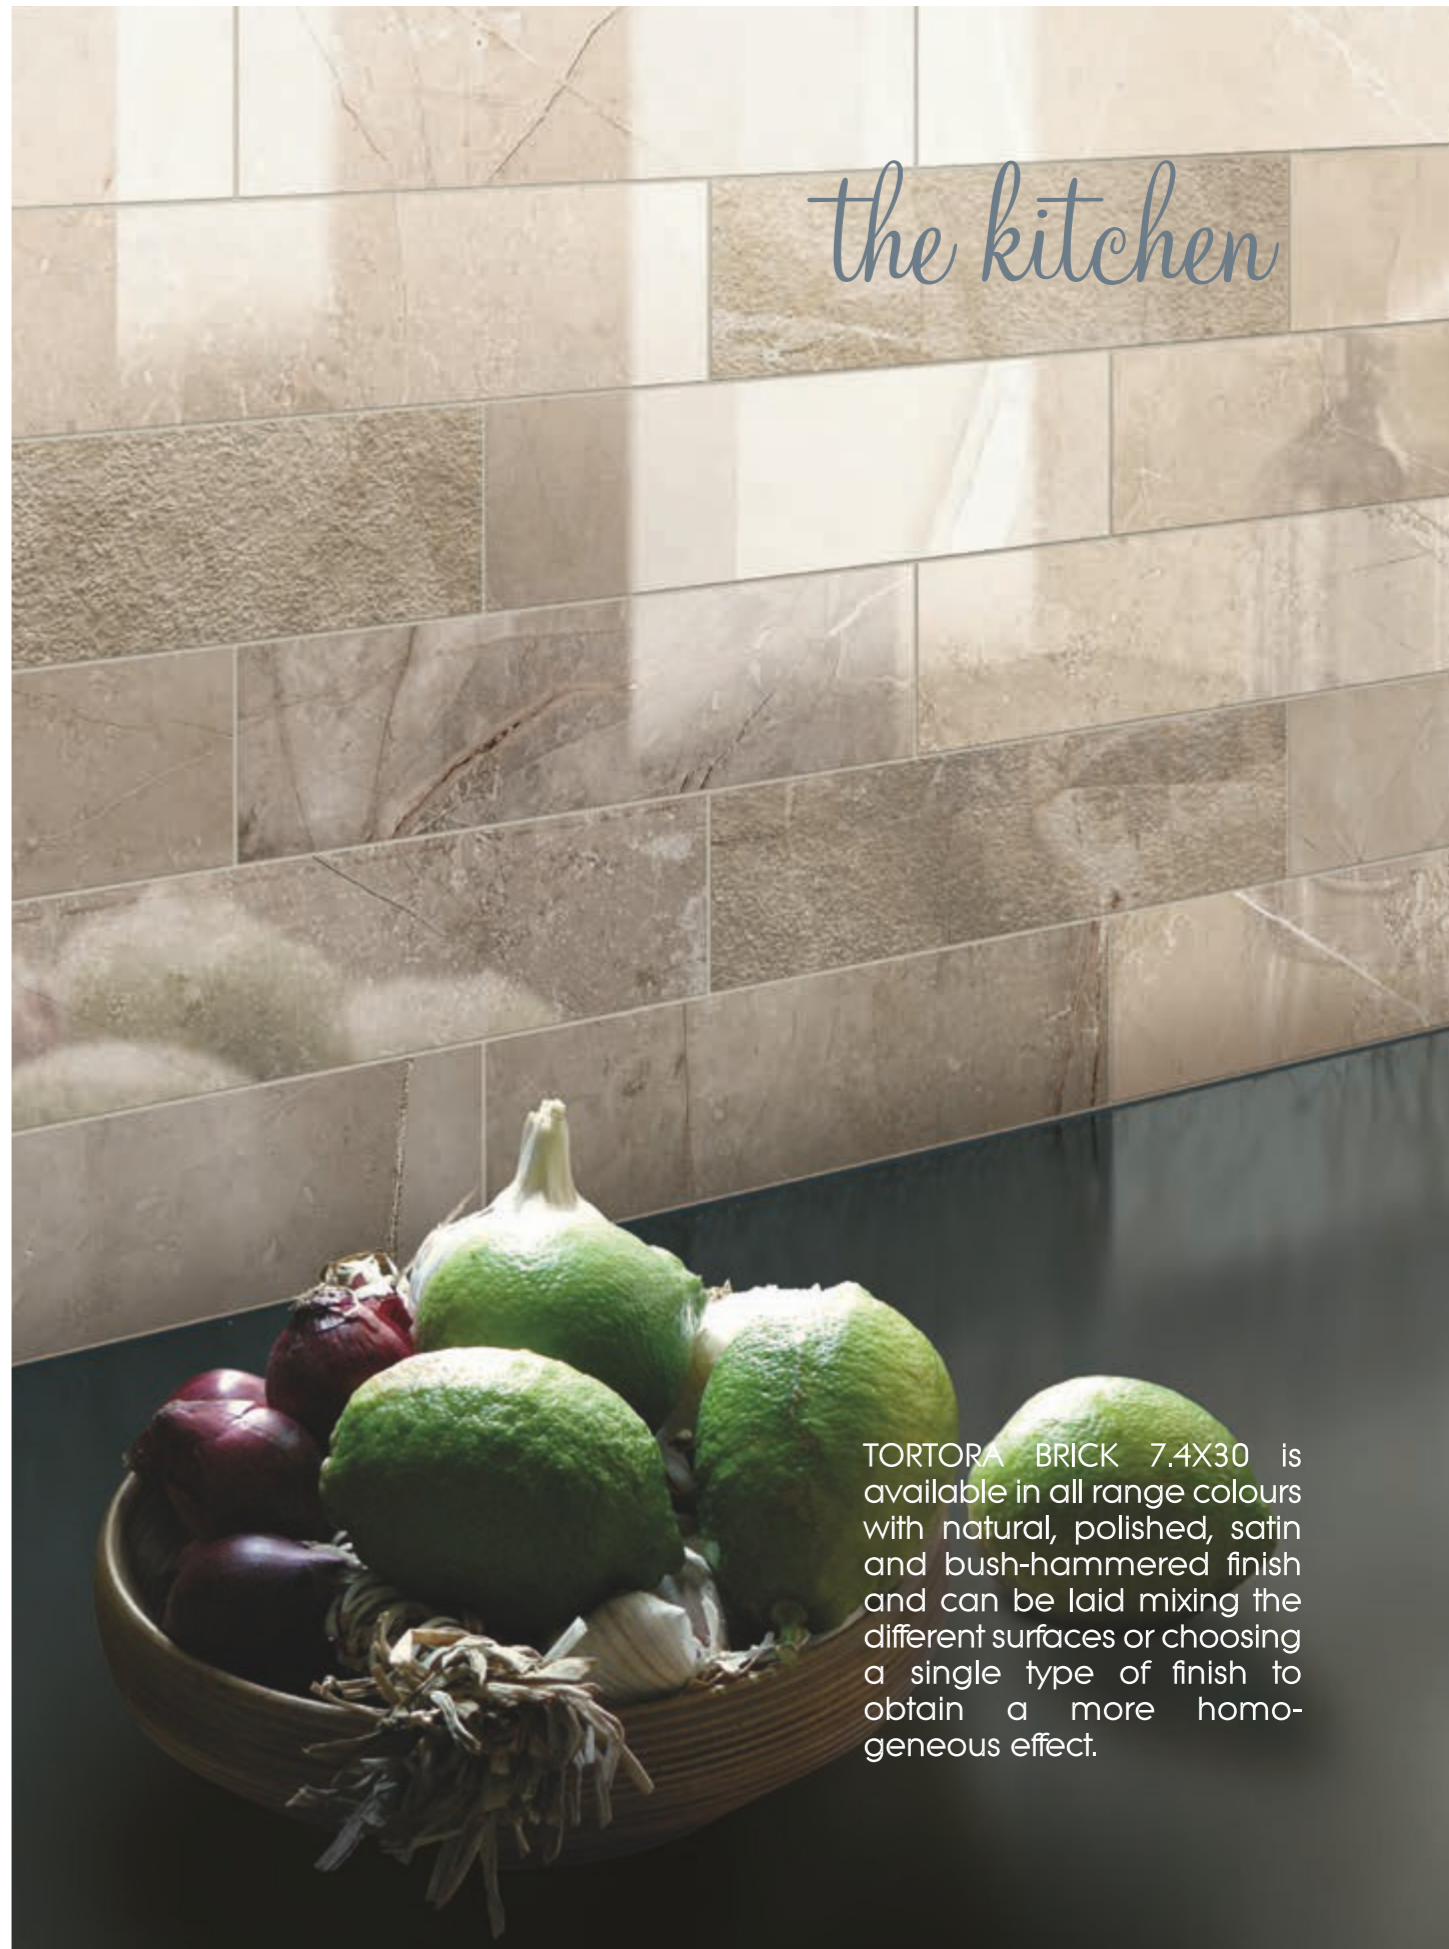

TORTORA BRICK 7.4X30 is available in all range colours with natural, polished, satin and bush-hammered finish and can be laid mixing the different surfaces or choosing a single type of finish to obtain a more homogeneous effect.

DECADENCE



TORTORA
BUSH-HAMMERED GRIP
60X120 is recommended for
outdoor spaces in residential
and commercial settings; it
confers continuity between
inside and outside while
maintaining graphic,
chromatic and dimensional
properties unaltered.

the patio

Absolute minimalism on the floor with the NATURAL BEIGE 60X60 option. The MOSAIC MIX 4.7x4.7 is a unique unmistakable detail to highlight architectural structures.

the wine bar


DECADENCE



the wine bar

The bathroom merges into the sleeping area: DECADENCE BIANCO gives life to walls and floors with different sizes and elegant decorations, surface finishes that join together enhancing the aesthetic appearance of the stone.

the bathroom

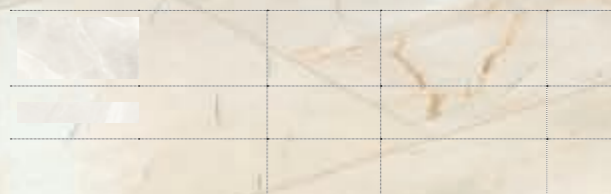

NATURAL GREY 60X120 on the floor is the perfect background for elegant walls created with the 20X120 MIX, which reflects light and shadows.

On the outside, the colour remains unchanged, but the surface of 60X60 GRIP gives maximum safety to the floor.


the lounge bar

DECADENCE



Outdoor living

DECADENCE

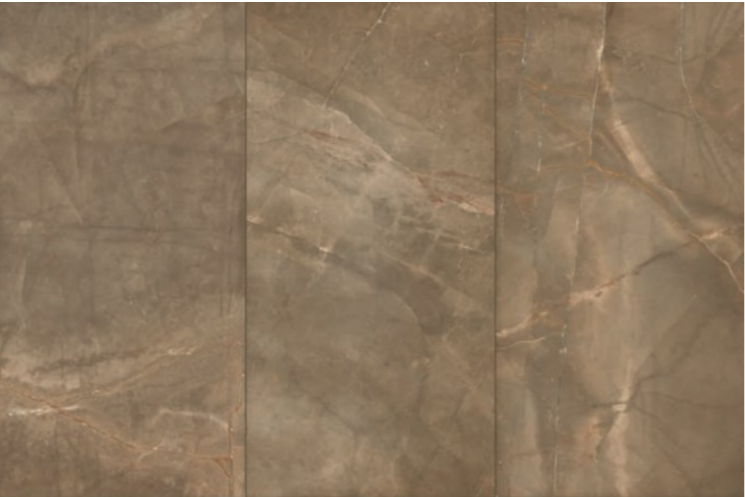

PURE



TORTORA



BEIGE



BIANCO



GREY






RECTIFIED COLOUR BODY PORCELAIN

TILES

NATURAL DIN 51130 R10 DIN 51097 A+B ASTM C 1028 DRY 0,69 WET 0,78 D.COF 0,54

BUSH HAMMERED DIN 51130 R10 DIN 51097 A+B ASTM C 1028 DRY 0,68 WET 0,69 D.COF 0,63


BUSH HAMMERED GRIP DIN 51130 R11 DIN 51097 A+B+C ASTM C 1028 DRY 0,79 WET 0,66 D.COF 0,79

 60x120 - 24"x48" RECTIFIED	NATURAL	10 ^{mm}	0.4"
	SATIN	10 ^{mm}	0.4"
	POLISHED	10 ^{mm}	0.4"
	BUSH HAMMERED	10 ^{mm}	0.4"
	BUSH HAMMERED GRIP	10 ^{mm}	0.4"
 20x120 - 8"x48" RECTIFIED	NATURAL	10 ^{mm}	0.4"
	SATIN	10 ^{mm}	0.4"
	POLISHED	10 ^{mm}	0.4"
	MIX 3 FINISHES	10 ^{mm}	0.4"
	PZ PER BOX: 2 IPOL, 1 NAT, 1 BH		
 60x60 - 24"x24" RECTIFIED	NATURAL	10 ^{mm}	0.4"
	SATIN	10 ^{mm}	0.4"
	POLISHED	10 ^{mm}	0.4"
	BUSH HAMMERED	10 ^{mm}	0.4"
	BUSH HAMMERED GRIP	10 ^{mm}	0.4"
 30x60 - 12"x24" RECTIFIED	NATURAL	10 ^{mm}	0.4"
	SATIN	10 ^{mm}	0.4"
	POLISHED	10 ^{mm}	0.4"
	BUSH HAMMERED	10 ^{mm}	0.4"
 7,4x30 - 2.9"x12" RECTIFIED	NATURAL	10 ^{mm}	0.4"
	SATIN	10 ^{mm}	0.4"
	POLISHED	10 ^{mm}	0.4"
	BUSH HAMMERED	10 ^{mm}	0.4"

DÉCOR PIECES



MOSAIC 4,7-1.8"
(30x30-12"x12")
Available in:
NATURAL
SATIN
POLISHED
MIX 3 FINISHES
polished, natural, bush hammered

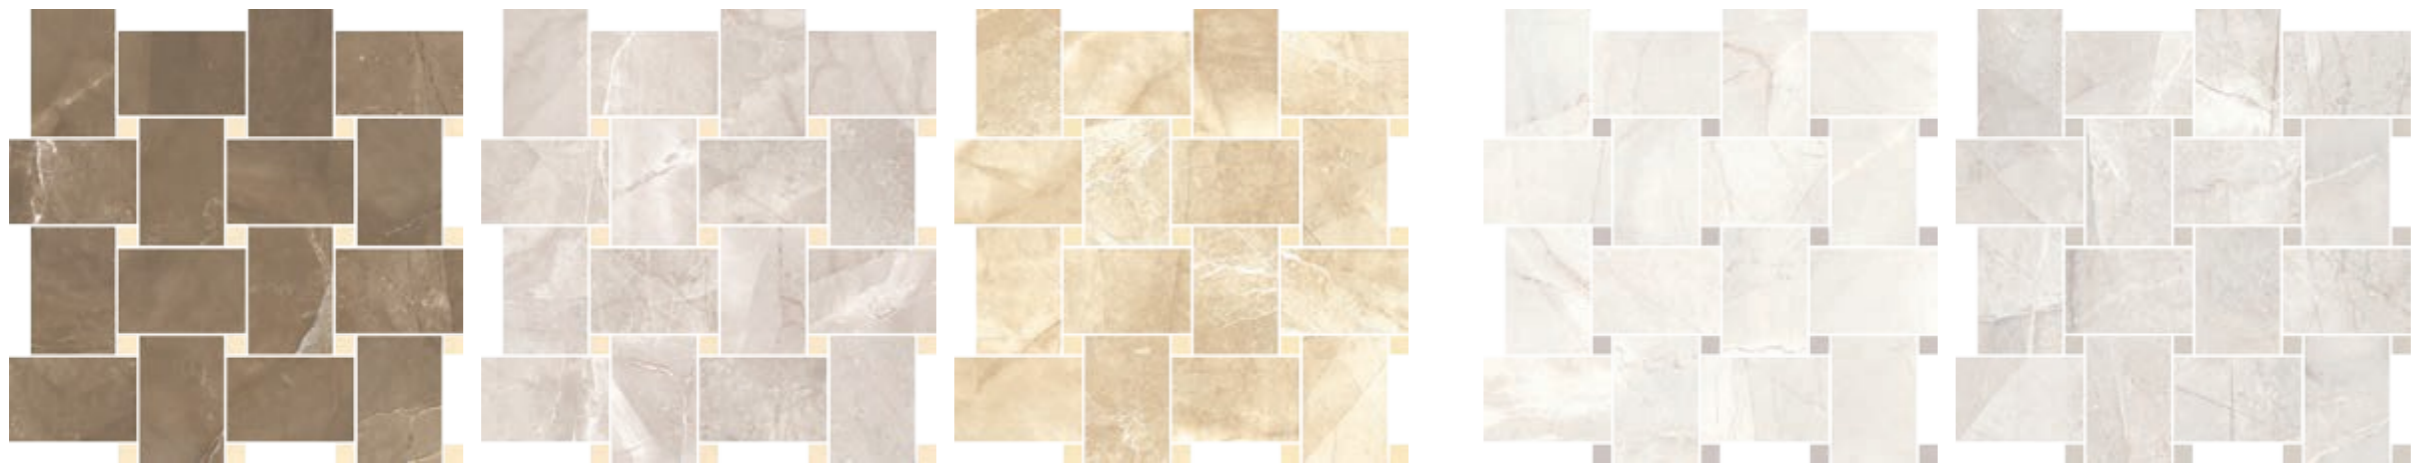

CONTRAST MOSAIC
30x30 - 12"x12"
PURE-TORTORA-BEIGE
WITH GOLD TOZZETTO

BIANCO-GRIGIO
WITH SILVER TOZZETTO
available in:
NATURALE
SATINATO
LEVIGATO




PIXEL 2D
15x30 - 6"x12"
Available in:
SATIN
MIX 3 FINISHES
polished natural, bush hammered
(For wall decoration only)

DECOR FINISHES

• NATURAL | BRUSHED | POLISHED | 3 MIXED SURFACES •


LAYING OPTIONS

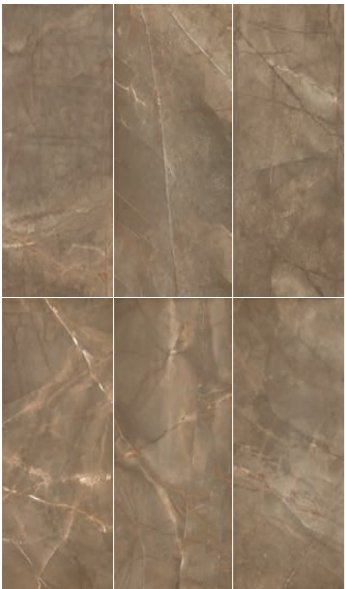

60x120
NATURAL
SATIN
POLISHED
BUSH HAMMERED
BUSH HAMMERED GRIP



60x60
NATURAL
SATIN
POLISHED
BUSH HAMMERED
BUSH HAMMERED GRIP

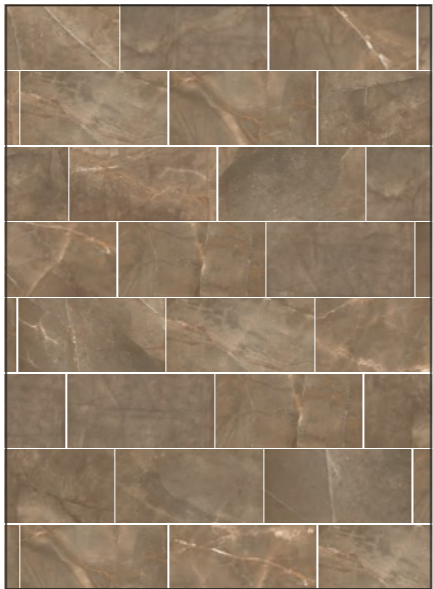


30x60
NATURAL
SATIN
POLISHED
BUSH HAMMERED



20x120
NATURAL
SATIN
POLISHED
BUSH HAMMERED
MIX 3 FINISHES



30x60
NATURAL
SATIN
POLISHED
BUSH HAMMERED

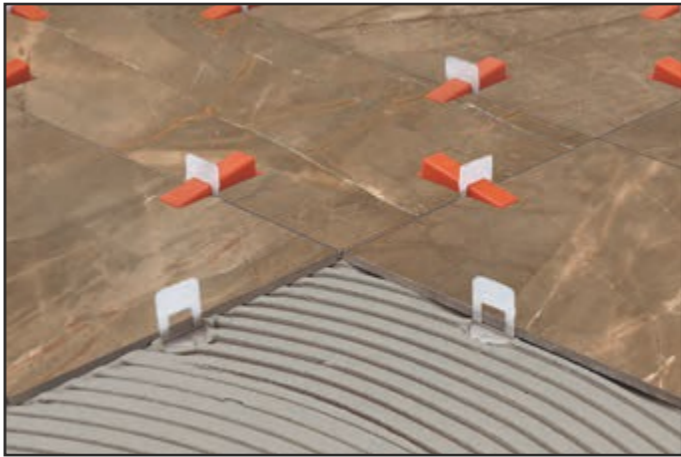

Laying with levelling spacers (wedges)
To lay floors and wall coverings using formats with sides greater than 60 cm, Rovic Tiles recommends the use of levelling spacers that allow the surface to be perfectly flat, keeping each tile in place and reducing laying time.

LAYING TIPS

We recommend laying tiles taking them alternately from different boxes, spreading them across 4 square meters on the ground to check the overall effect; shade variation is a special tile feature.










During laying, we recommend a 2mm grout joint and the use of levelling spacers. For smoothed tiles, we recommend exercising caution in handling and laying operations. Once laid, we recommend protecting the floor until all other construction work is completed.

Tiles with smooth or satin surface may, with time, undergo slight variations in colour and gloss, which give them a natural distressed look.


These products comply with the standards at present in force. Any indications of weight, measurements, dimensions, colours, shades and other data contained in this illustrative material are merely indicative and must not be understood as binding. To enhance the effect of shaded materials it is recommended to alternate items from different boxes while laying. When laying ground products it is advisable to use a self-levelling floor plaster with joints of not less than 2 mm. Rovic Tiles does not accept responsibility for defects resulting from the incorrect laying of materials. Maximum care should be taken when handling and laying polished products, in particular avoiding rubbing the tiles against each other. When laying is complete it is advisable to protect the floor with card-board up until completion of building work on the site. Owing to the special nature of these tiles we recommend that you quickly wipe the tiles with special detergents after grouting. Rovic Tiles reserves the right to modify the technical information reported in this catalogue. The colours and aesthetic features of the products are indicative, as it is not possible to reproduce them faithfully on paper.



Technical characteristics	Typical values	Expected limit values
Thickness 10mm		
 Water Absorption UNI EN ISO 10545-03	<= 0,5%	<= 0,5% UNI EN 14411 G
 Breaking strength UNI EN ISO 10545-04	>1300 N	1300 N min UNI EN 14411 G
 Modulus of rupture UNI EN ISO 10545-04	>35N/mm²	35 N/mm² min UNI EN 14411 G
 Shock resistance UNI EN ISO 10545-05	Restitution coefficient - e> 0,87	Available test method UNI EN 14411 G
 Resistance to deep abrasion UNI EN ISO 10545-06	<= 175 mm³	175 mm³ max UNI EN 14411 G
 Linear thermal expansion UNI EN ISO 10545-08	6,7 (10 ⁻⁶ °C ⁻¹)	Available test method UNI EN 14411 G
 Thermal shock resistance UNI EN ISO 10545-09	Resistant	Available test method UNI EN 14411 G
 Determination of moisture expansion UNI EN ISO 10545-10	0,1%	Available test method UNI EN 14411 G
 Frost resistance UNI EN ISO 10545-12	Resistant	Required UNI EN 14411 G
 Chemical resistance UNI EN ISO 10545-13	NATURAL A LC - HC BUSH HAMM A LA - HA B HAMM GRIP A LA - HA	UB Min. - UNI EN 14411 G From ULA to ULC from UHA to UHC
 Stain resistance UNI EN ISO 10545-14	NATURAL CLASS 4 BUSH HAMM CLASS 5 B HAMM GRIP CLASS 4	Class 3 min UNI EN 14411 G
 Slip resistance DIN 51130	NATURAL R 10 BUSH HAMM R 10 B HAMM GRIP R 11	From R9 to R13 BGR 181
 Slip resistance barefoot DIN 51097	NATURAL A+B BUSH HAMM A+B B HAMM GRIP A+B+C	From A to C GUV 26.17
 Static coefficient of friction C.O.F. ASTM C 1028	NATURAL DRY 0,69 BUSH HAMM DRY 0,68 B HAMM GRIP DRY 0,79	WET 0,78 WET 0,69 WET 0,66
 Dynamic coefficient of friction D.C.O.F.	NATURALE BOCCIARDATO BOCC GRIP	WET 0,54 WET 0,63 WET 0,79
 Shade Variation	V3	V1 Uniform V2 Light V3 Medium V4 High

DECADENCE	size cm		pieces box	sq. mt. box	weight box	box pallet	sq. mt. pallet	weight pallet
	60x120 24"x48"	TILE	2	1,42	32,37	32	45,44	1035,84
	20x120 8"x48"	TILE	4	0,94	21	40	37,6	840
	60x60 24"x24"	TILE	3	1,08	24	32	34,56	768
	30x60 12"x24"	TILE	6	1,08	23,4	40	43,2	936
	7,4x30 2,9"x12"	TILE	30	0,67	15	42	28,35	630
	4,7x4,7 1,8"x1,8"	MOSAIC	6	PZ X MQ	11,11	60	32,40	612
	30x30 12"x12"	CONTRAST MOS	6	PZ X MQ	12	60	30	612
	15x30 6"x12"	PIXEL 2D Wall décor	8	PZ X MQ	22,22	8	10,8	240
	4,8x120 1,9"x48"	SKIRTING TILE	6	ML 7,2	7	60	21,6	420
	4,8x60 1,9"x24"	SKIRTING TILE	20	ML 12	14,45	60	36	867
	10x60 4"x24"	SKIRTING TILE	10	ML 6	14,5	60	36	870
	4,8x60 1,9"x24"	STEP SKIRTING DX - SN (set 2 pz)	20	ST 10	15			
	10x60 4"x24"	SKIRTING STEP DX - SN (set 2 pz)	10	ST 5	12,5			
	33x120 13"x48"	STRAIGHT EDGE STEP TILE	2	PZ 2	21	20		420
	33x120 13"x48"	CORNER STRAIGHT EDGE STEP R - L	1	PZ 1	10,5	20		210

for technical reasons the weights indicated above may vary +/- 4%



Head Office:
E6 Chaucer Business Park
Watery Lane
Kemsing
Kent
TN15 6YP
01732 763167

51 High Street
West Malling
Kent
ME19 6QH
01732 848250

367 Blandford Road
Beckenham
Kent
BR3 4NW

01732 848250


www.rovic.co.uk

